

## FEATURES

- ▶ High Efficiency up to 88%
- ▶ 1500VDC Isolation
- ▶ MTBF > 1,000,000 Hours
- ▶ 2:1 Wide Input Range
- ▶ CSA60950-1 Safety Approval
- ▶ Complies with EN55022 Class A
- ▶ Over Voltage Protection
- ▶ Industry Standard Pinout
- ▶ UL 94V-0 Package Material
- ▶ Internal SMD Construction
- ▶ 3 Years Product Warranty



## PRODUCT OVERVIEW

Minmax's MIW5000-Series power modules operate over input voltage ranges of 9-18VDC, 18-36VDC and 36-75VDC which provide precisely regulated output voltages of 2.5V, 3.3V, 5V, 5.1V, 12V, 15V,  $\pm 12$ V and  $\pm 15$ VDC.

The MIW5000 series is an excellent selection for data communication equipments, mobile battery driven equipments, distributed power systems, telecommunication equipments, mixed analog/digital subsystems, process/machine control equipments, computer peripheral systems and industrial robot systems.

The modules have a maximum power rating of 10W and a typical full-load efficiency of 88%, continuous short circuit, 50mA output ripple, EN55022 Class A conducted noise compliance minimize design-in time, cost and eliminate the need for external filtering.

### Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load $\mu$ F	Efficiency (typ.) @Max. Load %		
			Max. mA	Min. mA	@Max. Load mA(typ.)	@No Load mA(typ.)					
MIW5021	12 (9 ~ 18)	3.3	3000	300	1006	40	60	2200	82		
MIW5022		5	2000	200	1004				83		
MIW5029		5.1	2000	200	1024				83		
MIW5023		12	833	83	957			87			
MIW5024		15	666	66.6	968			86			
MIW5026		$\pm 12$	$\pm 416$	$\pm 42$	957			220#	87		
MIW5027		$\pm 15$	$\pm 333$	$\pm 33$	968			150#	86		
MIW5030	24 (18 ~ 36)	2.5	3000	300	377	20	40	2200	83		
MIW5031		3.3	3000	300	485				85		
MIW5032		5	2000	200	479				87		
MIW5039		5.1	2000	200	489			87			
MIW5033		12	833	83	479			87			
MIW5034		15	666	66.6	478			470	87		
MIW5036		$\pm 12$	$\pm 416$	$\pm 42$	473			220#	88		
MIW5037		$\pm 15$	$\pm 333$	$\pm 33$	478			150#	87		
MIW5040		2.5	3000	300	188			10	40	2200	83
MIW5041		3.3	3000	300	243						85
MIW5042	5	2000	200	239	87						
MIW5049	5.1	2000	200	240	87						
MIW5043	12	833	83	239	87						
MIW5044	15	666	66.6	236	470	87					
MIW5046	$\pm 12$	$\pm 416$	$\pm 42$	243	220#	88					
MIW5047	$\pm 15$	$\pm 333$	$\pm 33$	244	150#	87					

# For each output


Input Specifications					
Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	7	8	9	
	24V Input Models	14	16	18	
	48V Input Models	30	33	36	
Under Voltage Shutdown	12V Input Models	---	---	8.5	
	24V Input Models	---	---	17	
	48V Input Models	---	---	34	
Reverse Polarity Input Current	All Models	---	---	1.5	A
Short Circuit Input Power		---	---	2500	mW
Internal Power Dissipation		---	---	2500	mW
Conducted EMI		Compliance to EN 55022,class A and FCC part 15,class A			

Output Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±1.2	%Vom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.3	±1.0	%
Load Regulation	Io=10% to 100%	---	±0.5	±1.2	%
	Io=10% to 100% (2.5Vo)	---	±0.7	±1.5	%
Ripple & Noise (20MHz)	25% Load Step Change	---	50	85	mV <sub>P-P</sub>
Transient Recovery Time		---	250	500	µsec
Transient Response Deviation		---	±3	±5	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Foldback	110	150	180	%
Short Circuit Protection		Continuous			


General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	1000	1200	pF
Switching Frequency		---	400	---	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1				

Input Fuse		
12V Input Models	24V Input Models	48V Input Models
2000mA Slow-Blow Type	1000mA Slow-Blow Type	500mA Slow-Blow Type

Environmental Specifications				
Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+75	°C
Case Temperature		---	+90	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

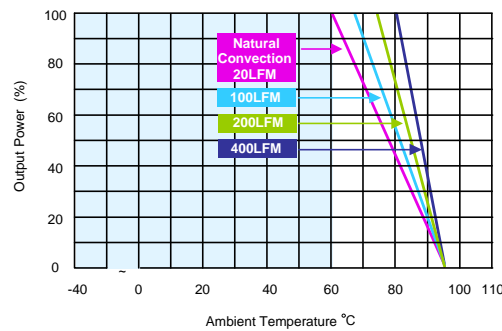**Power Derating Curve**

**Notes**

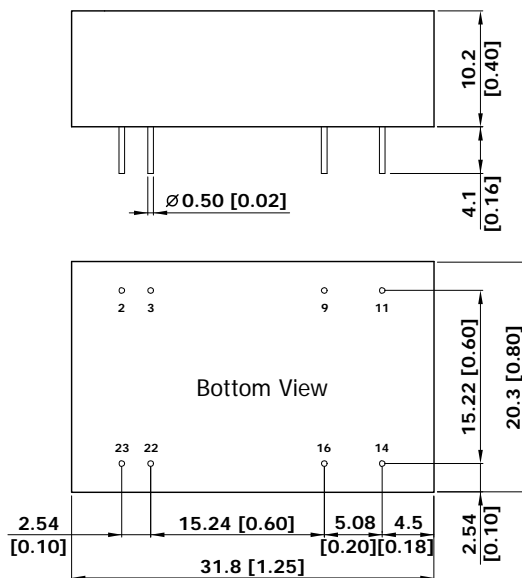- 1 Specifications typical at  $T_a = +25^\circ\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 50% to 100%
- 3 Ripple & Noise measurement bandwidth is 0-20MHz.
- 4 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 5 All DC/DC converters should be externally fused at the front end for protection.
- 6 Other input and output voltage may be available, please contact factory.
- 7 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 8 Specifications are subject to change without notice.

**Package Specifications**
**Mechanical Dimensions**

**Pin Connections**

Pin	Single Output	Dual Output
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance:  $X.X \pm 0.25$  ( $X.XX \pm 0.01$ )  
 $X.XX \pm 0.13$  ( $X.XXX \pm 0.005$ )
- ▶ Pin diameter  $\varnothing 0.5 \pm 0.05$  ( $0.02 \pm 0.002$ )


**Physical Characteristics**

Case Size	: 31.8x20.3x10.2mm (1.25x0.80x0.40 inches)
Case Material	: Metal With Non-Conductive Baseplate
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 17.3g

## Test Setup



### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 KHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

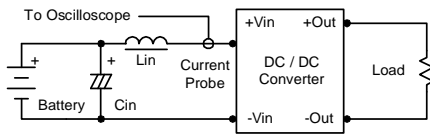

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

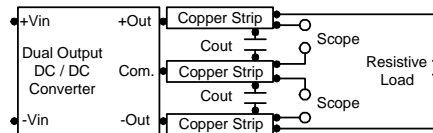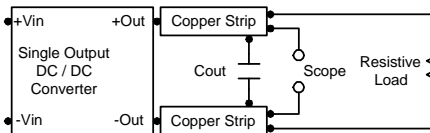

## Technical Notes

### Overcurrent Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage.



### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 12 $\mu$ F for the 12V, 4.7 $\mu$ F for the 24V input devices and a 2.2 $\mu$ F for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

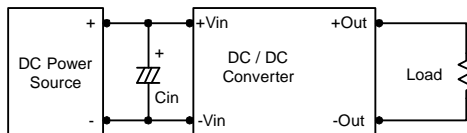

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 $\mu$ F capacitors at the output.

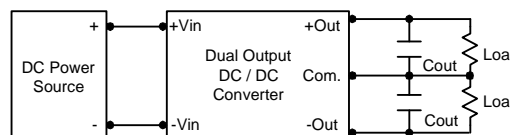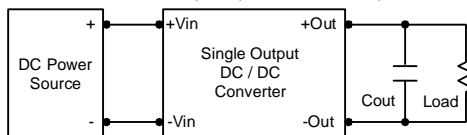

### Maximum Capacitive Load

The MIW5000 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C. The derating curves are determined from measurements obtained in a test setup.

