

VF-3W Series

3W Regulated Single output



Features

- 12 Pin SIL Package
- 1000 VDC Isolation
- Up to 5200 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 74%
- -25 ~ 71°C Operation Temperature Range



The VF series is a family of cost effective 3W single output DC-DC converters. These converters combine miniature package in a 12-pin SIL compatible case with high performance features such as 1000 VDC~5200 VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 with output voltage of 3.3, 5, 7.2, 9, 12, 15, 18, 24 Vdc. High performance features include high efficiency operation up to 74% and output voltage accuracy of $\pm 2\%$ maximum. Standard features include an input range of $\pm 10\%$ tolerance and low output noise and ripple.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 2\%$
Line regulation	$\pm 0.5\%$
Load regulation	(From 0% to 100% Load) $\pm 0.5\%$ (Output 3.3V Model) $\pm 1.5\%$
Ripple & noise (20 MHz bandwidth)(1)	75mV pk-pk
Short Circuit Protection	Indefinite(Automatic Recovery)
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	$\pm 10\%$
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	Capacitor
Input Reflected Ripple Current(3)	20mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table
I/O Isolation Voltage(60sec)	1000~5200Vdc
Input/Output	60 pF Typ.
I/O Isolation Capacitance	1000M Ohm
I/O Isolation Resistance	50kHz typ
Switching Frequency	95% rel H
Humidity	>1.12 Mhrs
Reliability Calculated MTBF(MIL-HDBK-217 F)	IEC 60950-1
Safety Standard : (designed to meet)	

PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	0.5mm Alloy42 Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	7.2g
Dimensions	1.26"x0.32"x0.57"

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	$-25^\circ\text{C} \sim 71^\circ\text{C}$ (See Derating Curve)
Maximum Case Temperature	100°C
Storage Temperature	$-40^\circ\text{C} \sim 125^\circ\text{C}$
Cooling	Nature Convection



ABSOLUTE MAXIMUM RATINGS(4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
5 Models	7 Vdc ,max.
12 Models	15 Vdc ,max.
24 Models	28 Vdc ,max.
Soldering Temperature	260°C ,max.
(1.5mm from case 10 sec. max.)	

EMC SPECIFICATIONS		
Radiated Emissions	EN55022	CLASS B
Conducted Emissions (6)	EN55022	CLASS B
ESD	IEC 61000-4-2	Perf. Criteria A
RS	IEC 61000-4-3	Perf. Criteria A
EFT (7)	IEC 61000-4-4	Perf. Criteria A
Surge (7)	IEC 61000-4-5	Perf. Criteria A
CS	IEC 61000-4-6	Perf. Criteria A
PFMF	IEC 61000-4-8	Perf. Criteria A

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

VF - 3W Regulated Single output

PART NUMBER STRUCTURE

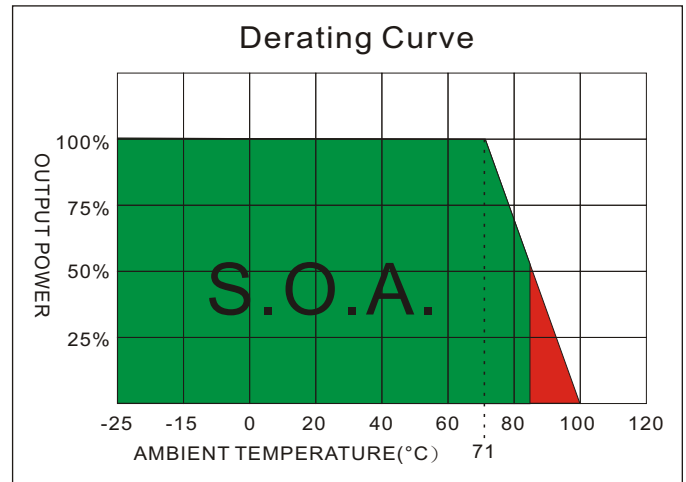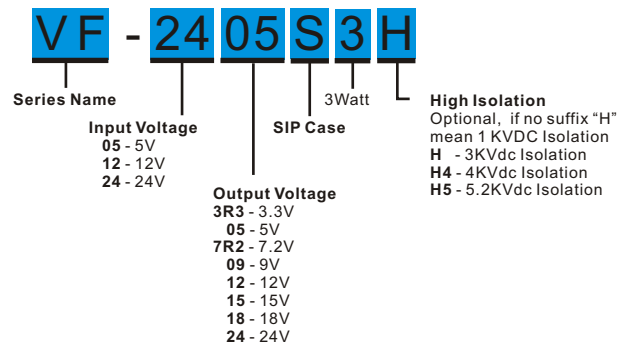

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT	INPUT Current		OUTPUT	OUTPUT Current	EFFICIENCY @FL(%)	Capacitor Load(uF)
	Voltage Range (Vdc)	No-Load (mA)	Full Load (mA)	Voltage (Vdc)	Full load (mA)		
VF-053R3S3	5	80	720	3.3	600	55	470
VF-0505S3	5	55	923	5	600	65	470
VF-057R2S3	5	90	896	7.2	416	67	470
VF-0509S3	5	70	857	9	333	70	470
VF-0512S3	5	70	882	12	250	68	470
VF-0515S3	5	90	870	15	200	69	470
VF-0518S3	5	100	896	18	166	67	470
VF-0524S3	5	100	970	24	125	69	470
VF-123R3S3	12	25	280	3.3	600	59	470
VF-1205S3	12	50	391	5	600	64	470
VF-127R2S3	12	35	352	7.2	416	71	470
VF-1209S3	12	35	352	9	333	71	470
VF-1212S3	12	40	342	12	250	73	470
VF-1215S3	12	50	352	15	200	71	470
VF-1218S3	12	30	357	18	166	70	470
VF-1224S3	12	30	342	24	125	73	470
VF-243R3S3	24	20	142	3.3	600	58	470
VF-2405S3	24	20	195	5	600	64	470
VF-247R2S3	24	20	187	7.2	416	67	470
VF-2409S3	24	20	174	9	333	72	470
VF-2412S3	24	20	169	12	250	74	470
VF-2415S3	24	21	176	15	200	71	470
VF-2418S3	24	30	174	18	166	72	470
VF-2424S3	24	20	169	24	125	74	470

Suffix "H" means 3 KVdc isolation


Suffix "H4" means 4 KVdc isolation

Suffix "H5" means 5.2 KVdc isolation

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR < 1.0 Ω at 100KHz) at nominal input and full load.

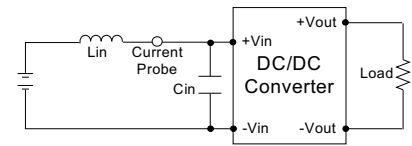


Output Ripple & Noise Measurement Test

The Scope measurement bandwidth is 20MHz .



EMI Filter

Input filter components (C1, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

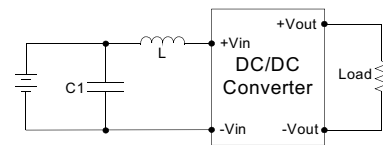


	C1	L
VF-05XXXXXX	220 μ F/100V	12 μ H
VF-12XXXXXX	220 μ F/100V	12 μ H
VF-24XXXXXX	220 μ F/100V	12 μ H


NOTE

1. Ripple/Noise measured with 20MHz bandwidth.
2. Tested by minimal V_{in} and constant resistive load.
3. Measured Input reflected ripple current with a simulated source inductance of 12 μ H.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. Input filter components are required to help meet conducted emission class B, which application refer to the EMI Filter of design & feature configuration.
7. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor Motien suggest: Nippon - chemi - con KY series, 470 μ F/100V.


VF - 3W Regulated Single output

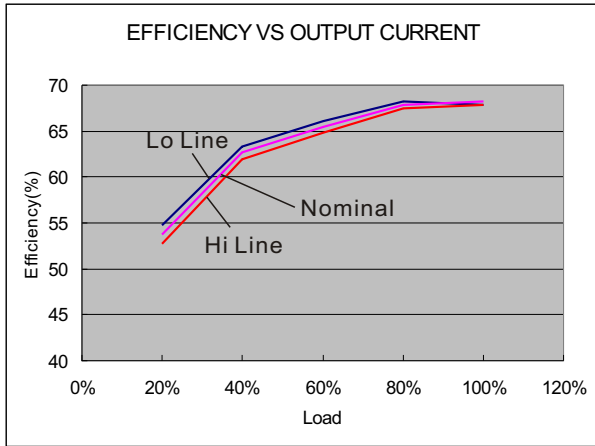

05 Models

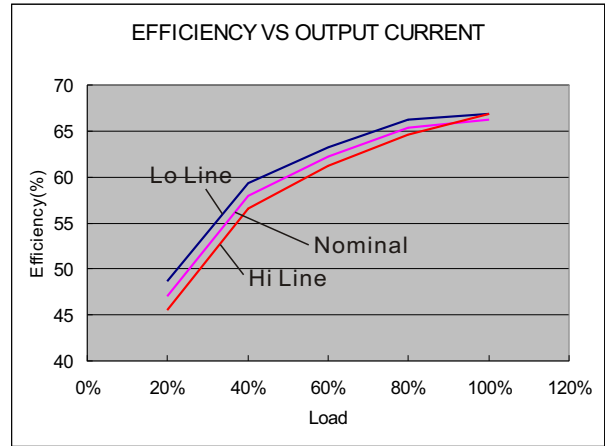


12 Models

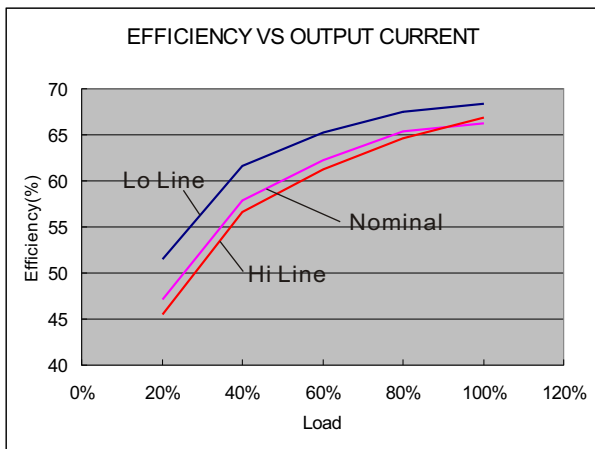

24 Models

MECHANICAL SPECIFICATIONS

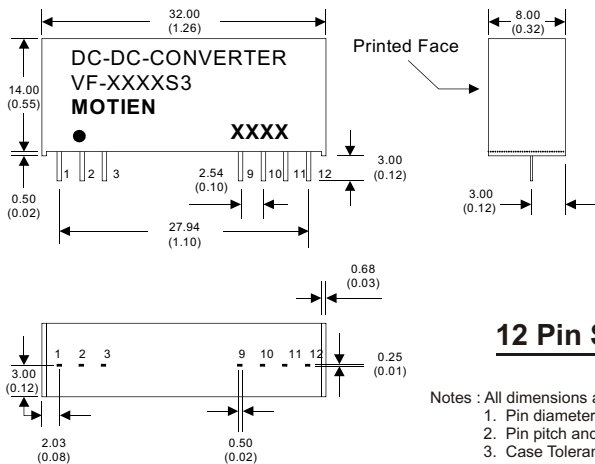

12 Pin SIL Package

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	SINGLE-H
1	+V Input	+V Input
2	N.C.	-V Input
3	N.C.	N.C.
9	N.C.	N.C.
10	-V Output	-V Output
11	+V Output	+V Output
12	-V Input	N.C.