

Stand: 14/11

Regulated
Case Style: SIP 8

COMMERCIAL DC/DC Converters

1 Watt / 2 Watt
Series: SL8W2

Electrical specifications:


Input Voltage: wide 2:1
Output Voltage Accuracy: typ. $\pm 2\%$
Line Regulation: max. $\pm 0,5\%$
Load Regulation (25% to 100% load): typ. $\pm 0,5\%$
Efficiency: up to 85%

Output Ripple & Noise @ 20MHz BW: max. 50mVp-p
Short Circuit Protection: continuous
Operating Temperature: -40°C to $+85^{\circ}\text{C}$
Isolation Voltage: min. 1000V DC
Part-No.: /H2 min. 2000V DC
Part-No.: /H3 min. 3000V DC

CAUTION: NO INPUT POLARITY CHANGE ALLOWED!

		1 Watt		2 Watt				1 Watt		2 Watt	
SINGLE Part - No.	Input Voltage	Output Voltage	Output Current	Output Current		DUAL Part - No.	Input Voltage	Output Voltage	Output Current	Output Current	
SL8W2-0503,3 SL8W2-0505 SL8W2-0509 SL8W2-0512 SL8W2-0515	4,5 - 9V	3,3V 5,0V 9,0V 12,0V 15,0V	300mA 200mA 111mA 83mA 67mA	500mA 400mA 222mA 166mA 134mA		SL8W2-0503,3D SL8W2-0505D SL8W2-0509D SL8W2-0512D SL8W2-0515D	4,5 - 9V	$\pm 3,3\text{V}$ $\pm 5,0\text{V}$ $\pm 9,0\text{V}$ $\pm 12,0\text{V}$ $\pm 15,0\text{V}$	$\pm 150\text{mA}$ $\pm 100\text{mA}$ $\pm 56\text{mA}$ $\pm 42\text{mA}$ $\pm 34\text{mA}$	$\pm 250\text{mA}$ $\pm 200\text{mA}$ $\pm 111\text{mA}$ $\pm 83\text{mA}$ $\pm 67\text{mA}$	
SL8W2-1203,3 SL8W2-1205 SL8W2-1209 SL8W2-1212 SL8W2-1215	9 - 18V	3,3V 5,0V 9,0V 12,0V 15,0V	300mA 200mA 111mA 83mA 67mA	500mA 400mA 222mA 166mA 134mA		SL8W2-1203,3D SL8W2-1205D SL8W2-1209D SL8W2-1212D SL8W2-1215D	9 - 18V	$\pm 3,3\text{V}$ $\pm 5,0\text{V}$ $\pm 9,0\text{V}$ $\pm 12,0\text{V}$ $\pm 15,0\text{V}$	$\pm 150\text{mA}$ $\pm 100\text{mA}$ $\pm 56\text{mA}$ $\pm 42\text{mA}$ $\pm 34\text{mA}$	$\pm 250\text{mA}$ $\pm 200\text{mA}$ $\pm 111\text{mA}$ $\pm 83\text{mA}$ $\pm 67\text{mA}$	
SL8W2-2403,3 SL8W2-2405 SL8W2-2409 SL8W2-2412 SL8W2-2415	18 - 36V	3,3V 5,0V 9,0V 12,0V 15,0V	300mA 200mA 111mA 83mA 67mA	500mA 400mA 222mA 166mA 134mA		SL8W2-2403,3D SL8W2-2405D SL8W2-2409D SL8W2-2412D SL8W2-2415D	18 - 36V	$\pm 3,3\text{V}$ $\pm 5,0\text{V}$ $\pm 9,0\text{V}$ $\pm 12,0\text{V}$ $\pm 15,0\text{V}$	$\pm 150\text{mA}$ $\pm 100\text{mA}$ $\pm 56\text{mA}$ $\pm 42\text{mA}$ $\pm 34\text{mA}$	$\pm 250\text{mA}$ $\pm 200\text{mA}$ $\pm 111\text{mA}$ $\pm 83\text{mA}$ $\pm 67\text{mA}$	
SL8W2-4803,3 SL8W2-4805 SL8W2-4809 SL8W2-4812 SL8W2-4815	36 - 72V	3,3V 5,0V 9,0V 12,0V 15,0V	300mA 200mA 111mA 83mA 68mA	500mA 400mA 222mA 166mA 134mA		SL8W2-4803,3D SL8W2-4805D SL8W2-4809D SL8W2-4812D SL8W2-4815D	36 - 72V	$\pm 3,3\text{V}$ $\pm 5,0\text{V}$ $\pm 9,0\text{V}$ $\pm 12,0\text{V}$ $\pm 15,0\text{V}$	$\pm 150\text{mA}$ $\pm 100\text{mA}$ $\pm 56\text{mA}$ $\pm 42\text{mA}$ $\pm 34\text{mA}$	$\pm 250\text{mA}$ $\pm 200\text{mA}$ $\pm 111\text{mA}$ $\pm 83\text{mA}$ $\pm 67\text{mA}$	

Any other output voltage available !

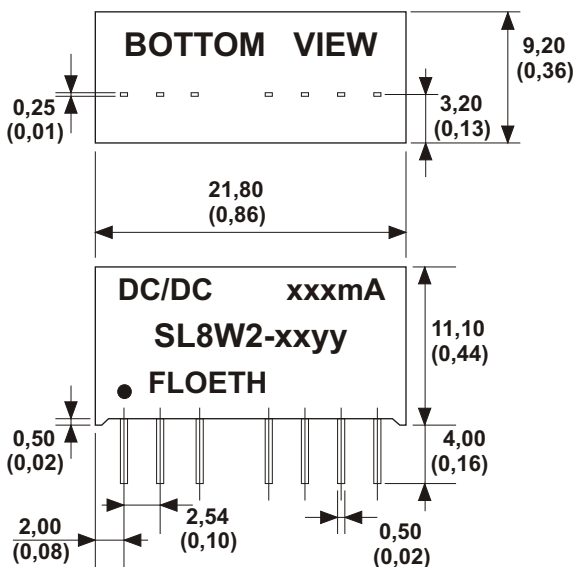

ALL DIMENSIONS IN MM (INCHES)
MILLIMETERS +/- 0,25mm
(INCHES +/- 0,01")
All pins on a 2,54mm pitch

PIN CONNECTION		
PIN	SINGLE	DUAL
1	- Vin	- Vin
2	+ Vin	+ Vin
3	NP Optional: CTRL	CTRL
5	NE	NE
6	+Vout	+Vout
7	- Vout	COM
8	CS Optional external capacitor	- Vout


NC = No Connection
NP = No Pin

Pin 5 (NE)

This pin is used internally and must have no external connection

Pin 8 (Cs)

This pin provides a connection point to the main reservoir capacitor. Additional capacitance can be added from this pin 7. Any low esr capacitor will improve ripple and noise in some measure. The benefit of this access point over simple additional output capacitance is that it precedes the output filter inductor. Maximum values of external capacitance will be dependent on the output voltage / loading of the converter and the desired ripple figure. Starting values can be in the range of 100 μF

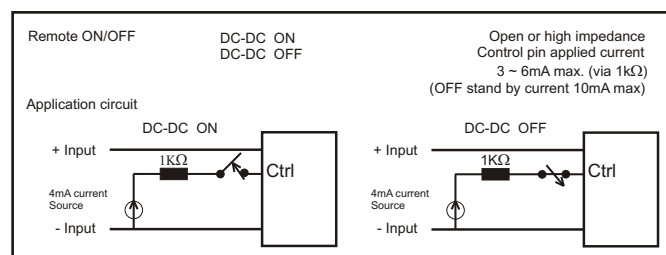

Specification may be changed without notice
please contact office for verification

We can offer EMC - Filter
according to EN55011/22 Class B.

Regulated
Case Style: SIP 8

COMMERCIAL DC/DC Converters

3 Watt
Series: SL8W2

Electrical specifications:

Input Voltage: wide 2:1
Output Voltage Accuracy: typ. $\pm 2\%$
Line Regulation: max. $\pm 0,5\%$
Load Regulation (20% to 100% load): typ. $\pm 0,5\%$
Efficiency: up to 84%

Output Ripple & Noise @ 20MHz BW: max. 50mVp-p continuous
Short Circuit Protection:
Operating Temperature: -40°C to +71°C
Isolation Voltage: min. 1000V DC
Part-Nr. /H2 min. 2000V DC
Part-Nr. /H3 min. 3000V DC


CAUTION: NO INPUT POLARITY CHANGE ALLOWED!

3 Watt					3 Watt				
SINGLE Part - No.	Input Voltage	Output Voltage	Output Current	max. Capacitive Load	DUAL Part - No.	Input Voltage	Output Voltage	Output Current	max. Capacitive Load
SL8W2-0503,3 SL8W2-0505 SL8W2-0509 SL8W2-0512 SL8W2-0515	4,5 - 9V	3,3V 5,0V 9,0V 12,0V 15,0V	600mA 600mA 333mA 250mA 200mA	1000µF 1000µF 470µF 220µF 100µF	SL8W2-0503,3D SL8W2-0505D SL8W2-0509D SL8W2-0512D SL8W2-0515D	4,5 - 9V	$\pm 3,3V$ $\pm 5,0V$ $\pm 9,0V$ $\pm 12,0V$ $\pm 15,0V$	$\pm 300mA$ $\pm 300mA$ $\pm 167mA$ $\pm 125mA$ $\pm 100mA$	$\pm 470\mu F$ $\pm 470\mu F$ $\pm 220\mu F$ $\pm 100\mu F$ $\pm 47\mu F$
SL8W2-1203,3 SL8W2-1205 SL8W2-1209 SL8W2-1212 SL8W2-1215	9 - 18V	3,3V 5,0V 9,0V 12,0V 15,0V	600mA 600mA 333mA 250mA 200mA	1000µF 1000µF 470µF 220µF 100µF	SL8W2-1203,3D SL8W2-1205D SL8W2-1209D SL8W2-1212D SL8W2-1215D	9 - 18V	$\pm 3,3V$ $\pm 5,0V$ $\pm 9,0V$ $\pm 12,0V$ $\pm 15,0V$	$\pm 300mA$ $\pm 300mA$ $\pm 167mA$ $\pm 125mA$ $\pm 100mA$	$\pm 470\mu F$ $\pm 470\mu F$ $\pm 220\mu F$ $\pm 100\mu F$ $\pm 47\mu F$
SL8W2-2403,3 SL8W2-2405 SL8W2-2409 SL8W2-2412 SL8W2-2415	18 - 36V	3,3V 5,0V 9,0V 12,0V 15,0V	600mA 600mA 333mA 250mA 200mA	1000µF 1000µF 470µF 220µF 100µF	SL8W2-2403,3D SL8W2-2405D SL8W2-2409D SL8W2-2412D SL8W2-2415D	18 - 36V	$\pm 3,3V$ $\pm 5,0V$ $\pm 9,0V$ $\pm 12,0V$ $\pm 15,0V$	$\pm 300mA$ $\pm 300mA$ $\pm 167mA$ $\pm 125mA$ $\pm 100mA$	$\pm 470\mu F$ $\pm 470\mu F$ $\pm 220\mu F$ $\pm 100\mu F$ $\pm 47\mu F$
SL8W2-4803,3 SL8W2-4805 SL8W2-4809 SL8W2-4812 SL8W2-4815	36 - 72V	3,3V 5,0V 9,0V 12,0V 15,0V	600mA 600mA 333mA 250mA 200mA	1000µF 1000µF 470µF 220µF 100µF	SL8W2-4803,3D SL8W2-4805D SL8W2-4809D SL8W2-4812D SL8W2-4815D	36 - 72V	$\pm 3,3V$ $\pm 5,0V$ $\pm 9,0V$ $\pm 12,0V$ $\pm 15,0V$	$\pm 300mA$ $\pm 300mA$ $\pm 167mA$ $\pm 125mA$ $\pm 100mA$	$\pm 470\mu F$ $\pm 470\mu F$ $\pm 220\mu F$ $\pm 100\mu F$ $\pm 47\mu F$

Input voltage range 3:1 also available!

Vin 9-27V (24) & Vin 20-60V(48)
for example: SL8W3-2405 3W


Any other output voltage available !

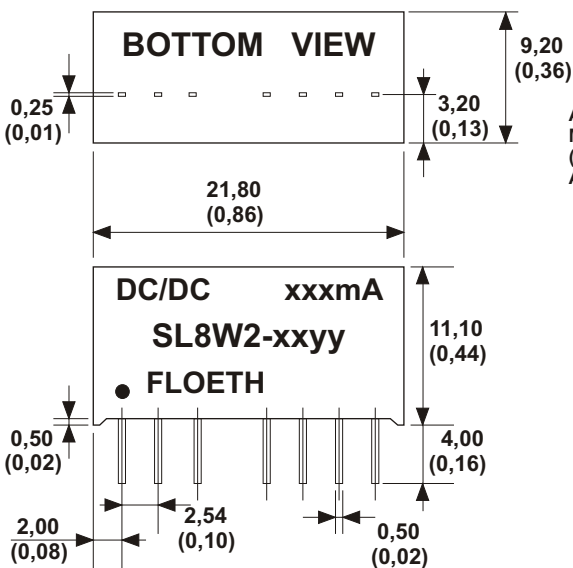

ALL DIMENSIONS IN MM (INCHES)
MILLIMETERS +/- 0,25mm
(INCHES +/- 0,01")
All pins on a 2,54mm pitch

PIN CONNECTION		
PIN	SINGLE	DUAL
1	- Vin	- Vin
2	+ Vin	+ Vin
3	CTRL	CTRL
5	NC	NC
6	+Vout	+Vout
7	- Vout	COM
8	NC	- Vout

NC = No Connection
NP = No Pin

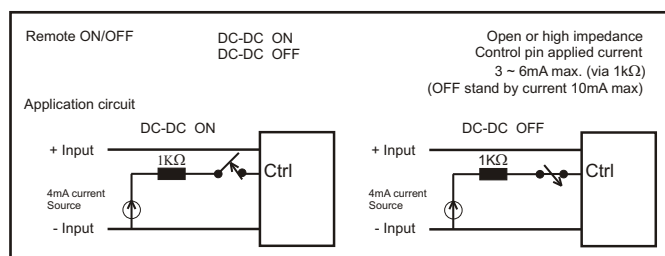

Specification may be changed without notice
please contact office for verification

We can offer EMC - Filter
according to EN55011/22 Class B.