

## Series AM4T-VZ

### 4 Watt | DC-DC Converter



#### FEATURES:

- Wide 2:1 input range
- 24 Pin DIP Package
- Metal package
- High efficiency up to 80%
- Operating temperature -40°C to + 85°C
- Input / Output isolation 1500 / 3500 VDC
- Pin compatible with multiple manufacturers
- Continuous short circuit protection



#### Models

##### Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (µF)	Efficiency (%)
AM4T-1205S-VZ	9-18	5	800	2200	72
AM4T-1209S-VZ	9-18	9	444	470	78
AM4T-1212S-VZ	9-18	12	333	470	78
AM4T-1215S-VZ	9-18	15	267	470	77
AM4T-1224S-VZ	9-18	24	167	220	76
AM4T-2405S-VZ	18-36	5	800	2200	77
AM4T-2409S-VZ	18-36	9	444	470	78
AM4T-2412S-VZ	18-36	12	333	470	79
AM4T-2415S-VZ	18-36	15	267	470	80
AM4T-2424S-VZ	18-36	24	167	220	77
AM4T-4805S-VZ	36-72	5	800	2200	77
AM4T-4809S-VZ	36-72	9	444	470	77
AM4T-4812S-VZ	36-72	12	333	470	78
AM4T-4815S-VZ	36-72	15	267	470	77
AM4T-4824S-VZ	36-72	24	167	220	75
AM4T-1205SH35-VZ	9-18	5	800	2200	72
AM4T-1209SH35-VZ	9-18	9	444	470	78
AM4T-1212SH35-VZ	9-18	12	333	470	78
AM4T-1215SH35-VZ	9-18	15	267	470	77
AM4T-1224SH35-VZ	9-18	24	167	220	76
AM4T-2405SH35-VZ	18-36	5	800	2200	77
AM4T-2409SH35-VZ	18-36	9	444	470	78
AM4T-2412SH35-VZ	18-36	12	333	470	79
AM4T-2415SH35-VZ	18-36	15	267	470	80
AM4T-2424SH35-VZ	18-36	24	167	220	77
AM4T-4805SH35-VZ	36-72	5	800	2200	77
AM4T-4809SH35-VZ	36-72	9	444	470	77
AM4T-4812SH35-VZ	36-72	12	333	470	78
AM4T-4815SH35-VZ	36-72	15	267	470	77
AM4T-4824SH35-VZ	36-72	24	167	220	75

#### Models

##### Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (µF)	Efficiency (%)
AM4T-1205D-VZ	9-18	±5	±400	±1000	77
AM4T-1209D-VZ	9-18	±9	±222	±220	77
AM4T-1212D-VZ	9-18	±12	±167	±220	78
AM4T-1215D-VZ	9-18	±15	±133	±220	78
AM4T-1224D-VZ	9-18	±24	±83	±100	77
AM4T-2405D-VZ	18-36	±5	±400	±1000	77
AM4T-2409D-VZ	18-36	±9	±222	±220	77
AM4T-2412D-VZ	18-36	±12	±167	±220	78
AM4T-2415D-VZ	18-36	±15	±133	±220	79
AM4T-2424D-VZ	18-36	±24	±83	±100	76
AM4T-4805D-VZ	36-72	±5	167	220	75

## Models

### Dual output (continued)

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (μF)	Efficiency (%)
AM4T-4809D-VZ	36-72	±9	±222	±220	77
AM4T-4812D-VZ	36-72	±12	±167	±220	77
AM4T-4815D-VZ	36-72	±15	±133	±220	78
AM4T-4824D-VZ	36-72	±24	±83	±100	76
AM4T-1205DH35-VZ	9-18	±5	±400	±1000	77
AM4T-1209DH35-VZ	9-18	±9	±222	±220	77
AM4T-1212DH35-VZ	9-18	±12	±167	±220	78
AM4T-1215DH35-VZ	9-18	±15	±133	±220	78
AM4T-1224DH35-VZ	9-18	±24	±83	±100	77
AM4T-2405DH35-VZ	18-36	±5	±400	±1000	77
AM4T-2409DH35-VZ	18-36	±9	±222	±220	77
AM4T-2412DH35-VZ	18-36	±12	±167	±220	78
AM4T-2415DH35-VZ	18-36	±15	±133	±220	79
AM4T-2424DH35-VZ	18-36	±24	±83	±100	76
AM4T-4805DH35-VZ	36-72	±5	±400	±1000	73
AM4T-4809DH35-VZ	36-72	±9	±222	±220	77
AM4T-4812DH35-VZ	36-72	±12	±167	±220	77
AM4T-4815DH35-VZ	36-72	±15	±133	±220	78
AM4T-4824DH35-VZ	36-72	±24	±83	±100	76

## Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	12	9-18		VDC
	24	18-36		
	48	36-72		
Filter	π (Pi) Network			
Start up time		20		ms
Absolute Maximum Rating	12 Vin	-0.7-24		VDC
	24 Vin	-0.7-40		
	48 Vin	-0.7-80		
Peak Input Voltage time		15		ms

## Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3 sec		1500 (3500 H35 model)	VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

## Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±1		%
Voltage balance	Balanced Load	±1		%
Short circuit protection	Continuous			
Short circuit restart	Auto Recovery			
Line voltage regulation	HL-LL	±0.5		%
Load voltage regulation	25-100% Load	±0.5		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise *	At 20MHz Bandwidth	60		mV p-p

\* In order to achieve ripple and noise specification, a 100μF capacitor is required to be connected to the output of the converter

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency		100-400		KHz
Operating temperature	Full Load (see derating chart)	-40 to +85		°C
Storage temperature		-40 to +125		°C
Max Case temperature			100	°C
Cooling	Free air convection			
Humidity			95	%
Case material	Nickel coated copper			
Weight		12.16		g
Dimensions(L x W x H)	Tolerance $\pm 0.5$ mm or $\pm 0.02$ inches	1.25 x 0.8 x 0.4 inches	31.75 x 20.32 x 10.16 mm	
MTBF	>2,200,000 hrs (MIL-HDBK -217F, Ground Benign, $t=+25^{\circ}\text{C}$ )			

### Safety Specifications


Parameters	
Agency approvals	CE
Standards	Designed to meet IEC 60950-1

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


### Pin Out Specifications

Pin	1500 and 3500VDC	
	Single	Dual
2	-V Input	-V Input
3	-V Input	-V Input
9	No pin	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

### Dimensions

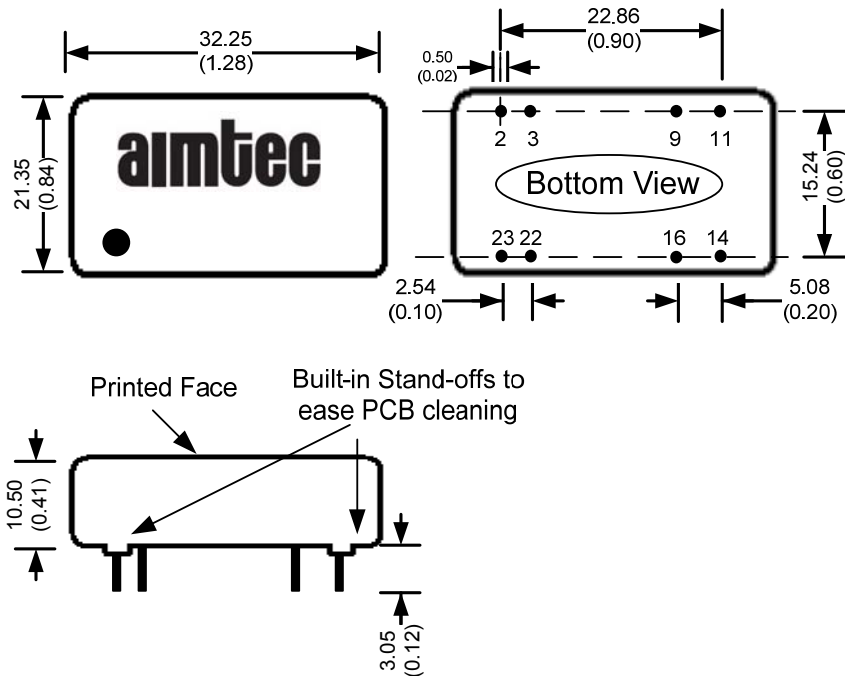

**Derating**

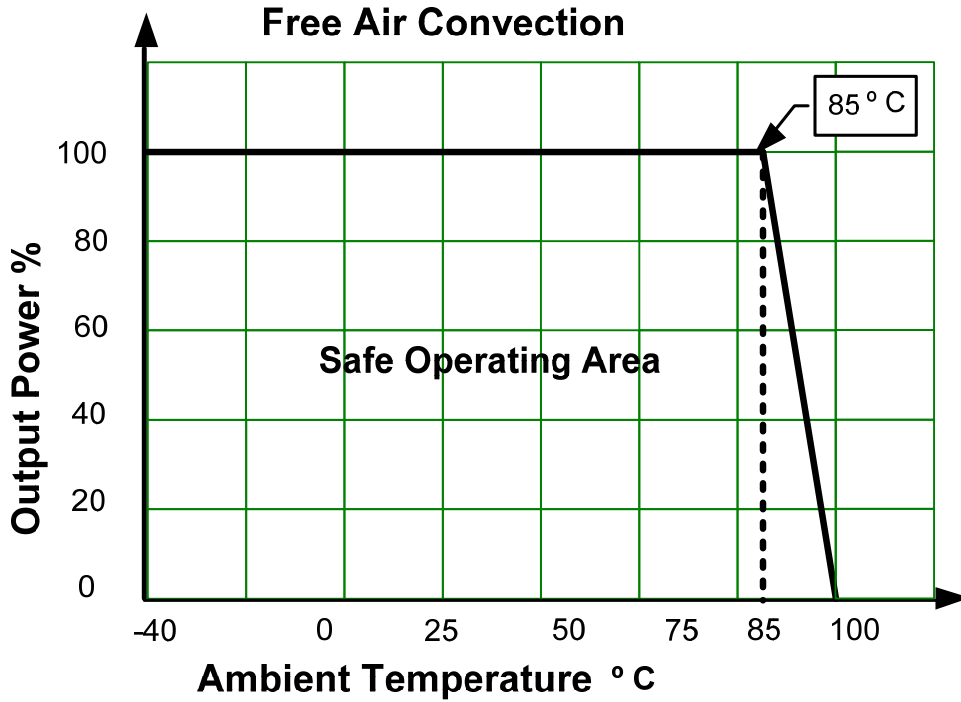

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).