

## FEATURES

- ▶ SMD Package with Industry Standard Pinout
- ▶ Package Dimension:  
33.3 x 20.8 x 9.8 mm (1.31"x 0.82"x 0.39" inches)
- ▶ Wide 2:1 Input Range
- ▶ Efficiency up to 85%
- ▶ I/O-isolation 1500VDC
- ▶ Operating Temp. Range -40°C to +85°C
- ▶ Qualified for lead-free Reflow Solder Process according IPC/JEDEC J-STD-020D.1
- ▶ Input Filter meets EN55022, class A and FCC, level A
- ▶ 3 Years Product Warranty



## PRODUCT OVERVIEW

The MINMAX MSKW2000 series is a range of isolated 5W DC/DC converter modules featuring fully regulated output voltages and wide 2:1 input voltage ranges.

These products are in a low profile SMD package with dimensions of 33.4 x 20.8 x 9.8 mm. All models are qualified for lead free reflow solder processes according IPC J-STD-020D.1. An excellent efficiency allows an operating temperature range of -40° to +85°C (with derating).

Typical applications for these converters are battery operated equipment and instrumentation, communication and general industrial electronics.

### Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load µF	Efficiency (typ.) @Max. Load %
			Max.	Min.	@Max. Load	@No Load			
			mA	mA	mA(typ.)	mA(typ.)			
MSKW2021	12 (9 ~ 18)	3.3	1200	120	434	45	25	680	76
MSKW2022		5	1000	100	521				80
MSKW2023		12	417	41.7	502				83
MSKW2024		15	333	33.3	502				83
MSKW2025		±5	±500	±50	521				80
MSKW2026		±12	±208	±20.8	501				83
MSKW2027		±15	±167	±16.7	503				83
MSKW2031	24 (18 ~ 36)	3.3	1200	120	212	15	15	680	78
MSKW2032		5	1000	100	254				82
MSKW2033		12	417	41.7	245				85
MSKW2034		15	333	33.3	245				85
MSKW2035		±5	±500	±50	254				82
MSKW2036		±12	±208	±20.8	245				85
MSKW2037		±15	±167	±16.7	246				85
MSKW2041	48 (36 ~ 75)	3.3	1200	120	106	6	10	680	78
MSKW2042		5	1000	100	127				82
MSKW2043		12	417	41.7	123				85
MSKW2044		15	333	33.3	122				85
MSKW2045		±5	±500	±50	127				82
MSKW2046		±12	±208	±20.8	122				85
MSKW2047		±15	±167	±16.7	123				85

# For each output

### Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	7.5	8	9	
	24V Input Models	14	16	18	
	48V Input Models	30	33	36	
Under Voltage Shutdown	12V Input Models	6.5	7	8	
	24V Input Models	13	15	17	
	48V Input Models	28	31	34	
Reverse Polarity Input Current	All Models	---	---	1	A
Short Circuit Input Power		---	1000	3000	mW
Internal Power Dissipation		---	---	2500	mW
Conducted EMI		Compliance to EN 55022,class A and FCC part 15,class A			

### Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	±1.0	%Vom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.1	±0.3	%
Load Regulation	Io=20% to 100%	---	±0.3	±1.0	%
Ripple & Noise	0-20 MHz Bandwidth	---	---	85	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change	---	250	500	µsec
Transient Response Deviation		---	±2	±6	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Foldback	115	140	165	%
Short Circuit Protection		Continuous			

### General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	650	750	pF
Switching Frequency		200	260	350	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 2			
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-scheme)				


### Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	2.5V ~ 5.5V or Open Circuit				
Converter Off	-0.7V ~ 0.8V				
Control Input Current (on)	Vctrl = Min. to Max.	---	---	-200	µA
Control Input Current (off)	Vctrl = Min. to Max.	---	---	-300	µA
Control Common	Referenced to Negative Input				
Standby Input Current		---	---	10	mA

### Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+85	°C
Case Temperature		---	+90	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

### Power Derating Curve

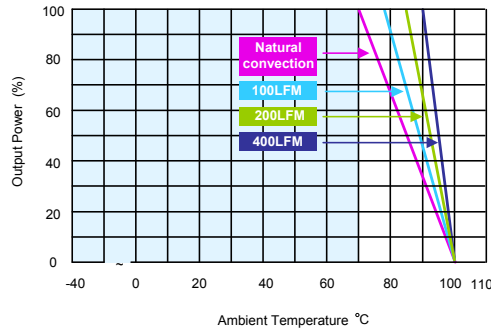


### Notes


- Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%
- These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact factory.
- That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- Specifications are subject to change without notice.

### Package Specifications

#### Mechanical Dimensions

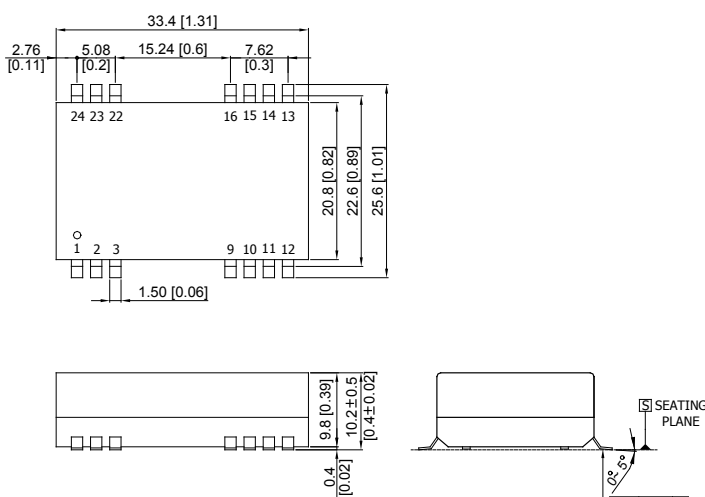

#### Connecting Pin Patterns

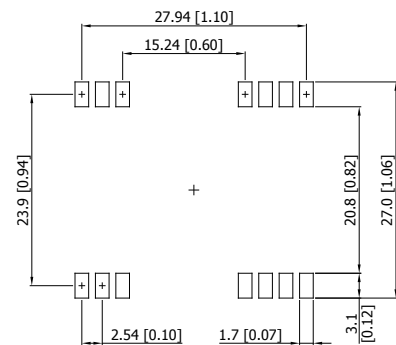

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)  
X.XX±0.13 (X.XXX±0.005)
- ▶ Pins ±0.05 (±0.002)

Pin Connections		
Pin	Single Output	Dual Output
1	Remote On/Off	Remote On/Off
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC	NC
11	NC	-Vout
12	NC	NC
13	NC	NC
14	+Vout	+Vout
15	NC	NC
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin
24	NC	NC


NC : No Connection

Physical Characteristics	
Case Size	: 33.4x20.8x10.2mm (1.31x0.82x0.4 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: phosphor bronze
Weight	: 14g

## Test Setup



### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 KHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

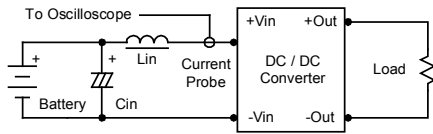

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

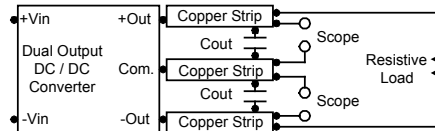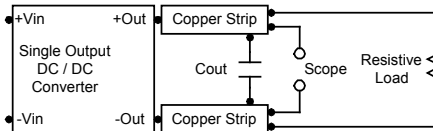

## Technical Notes

### Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is -0.7V to 0.8V. A logic high is 2.5V to 5.5V.

The maximum sink current of the switch at on/off terminal during a logic low is 300 $\mu$ A. The maximum sink current of the switch at on/off terminal = 2.5 to 5.5V is 200 $\mu$ A or open.

### Overcurrent Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.



In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 KHz) capacitor of a 3.3 $\mu$ F for the 12V input devices and a 2.2 $\mu$ F for the 24V and 48V devices.

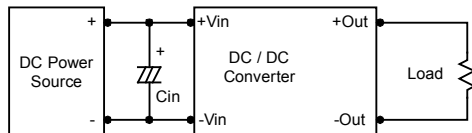

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 $\mu$ F capacitors at the output.

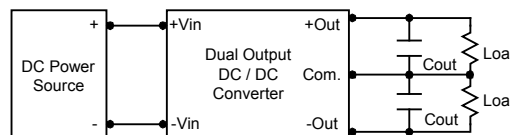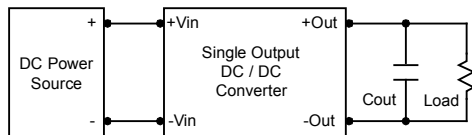

### Maximum Capacitive Load

The MSKW2000 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100 $\mu$ F maximum capacitive load for dual outputs and 680 $\mu$ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C. The derating curves are determined from measurements obtained in a test setup.

