

R6-1.5W Series



1.5W 2:1 Regulated Single & Dual output

Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 75%
- -40 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case



The R6 series is a family of cost effective 1.5W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 and 48 with output voltage of 5, 7.2, 9, 12, 15, 18, 24, ± 5 , ± 7.2 , ± 9 , ± 12 , $\pm 15 \pm 18$, and ± 24 Vdc. High performance features include high efficiency operation up to 78% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$
Line regulation	$\pm 0.5\%$
Load regulation	$\pm 0.5\%$
Ripple & noise(20 MHz bandwidth)(1)	60mV pk-pk
Short circuit protection	Continuous
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	See table
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	PI Type
Input Reflected Ripple Current(3)	35mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(3 sec)	
Input/Output	1500~3500Vdc
Metal Case/Input & Output	1000Vdc
I/O Isolation Capacitance	60 pF Typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	100~400kHz
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1Mhrs
Safety Standard : (designed to meet)	IEC 60950-1

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	$-40^\circ\text{C} \sim 85^\circ\text{C}$ (See Derating Curve)
Maximum Case Temperature	100°C
Storage Temperature	$-40^\circ\text{C} \sim 125^\circ\text{C}$
Cooling	Nature Convection

PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated) Nickel-coated Copper
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	$\varnothing 0.5\text{mm}$ Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	12.5g(Plastic Case)/15.0g(Metal Case)
Dimensions	1.25"x0.8"x0.4"



ABSOLUTE MAXIMUM RATINGS(4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
5 Models	15 Vdc ,max.
12 Models	24 Vdc ,max.
24 Models	40 Vdc ,max.
48 Models	80 Vdc ,max.
Soldering Temperature (1.5mm from case 10sec. max.)	260°C max.

EMC SPECIFICATIONS		
Radiated Emissions	EN55022	CLASS A
Conducted Emissions (7)	EN55022	CLASS A
ESD	IEC 61000-4-2	Perf. Criteria A
RS	IEC 61000-4-3	Perf. Criteria A
EFT (8)	IEC 61000-4-4	Perf. Criteria A
Surge (8)	IEC 61000-4-5	Perf. Criteria A
CS	IEC 61000-4-6	Perf. Criteria A
PFMF	IEC 61000-4-8	Perf. Criteria A

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

R6 - 1.5W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

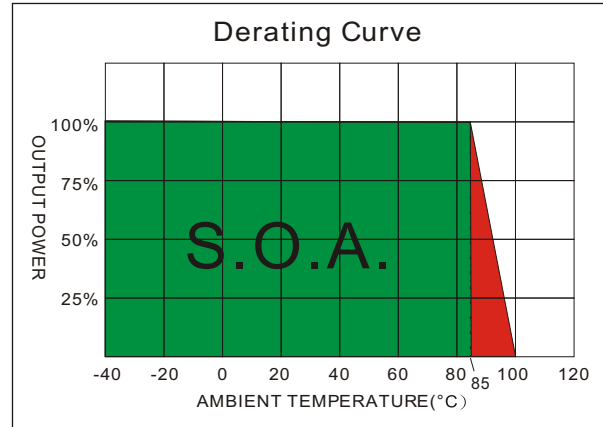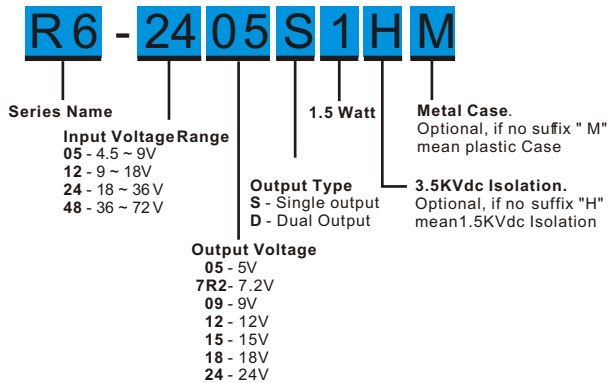

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (%)	Capacitor Load(μF)
		No-Load (mA)	Full Lo ad (mA)		Min. lo ad (mA)	Full lo ad (mA)		
R6-0505S1	4.5-9	40	429	5	75	300	70	2200
R6-057R2S1	4.5-9	40	423	7.2	52	208	70	1000
R6-0509S1	4.5-9	40	423	9	42	167	71	470
R6-0512S1	4.5-9	40	417	12	125	125	72	470
R6-0515S1	4.5-9	40	417	15	31	100	72	470
R6-0518S1	4.5-9	40	417	18	21	83	72	220
R6-0524S1	4.5-9	40	429	24	16	63	72	220
R6-0505D1	4.5-9	40	423	±5	±38	±150	65	±1000
R6-057R2D1	4.5-9	40	423	±7.2	±26	±104	65	±220
R6-0509D1	4.5-9	40	417	±9	±21	±83	67	±220
R6-0512D1	4.5-9	40	417	±12	±16	±63	70	±220
R6-0515D1	4.5-9	40	417	±15	±13	±50	67	±220
R6-0518D1	4.5-9	40	423	±18	±10	±42	66	±220
R6-0524D1	4.5-9	40	423	±24	±8	±31	66	±100
R6-1205S1	9-18	20	176	5	75	300	71	2200
R6-127R2S1	9-18	40	176	7.2	52	208	71	1000
R6-1209S1	9-18	20	171	9	42	167	73	470
R6-1212S1	9-18	20	171	12	125	125	73	470
R6-1215S1	9-18	20	169	15	31	100	74	470
R6-1218S1	9-18	40	174	18	21	83	72	220
R6-1224S1	9-18	20	176	24	16	63	71	220
R6-1205D1	9-18	20	176	±5	±38	±150	71	±1000
R6-127R2D1	9-18	40	176	±7.2	±26	±104	71	±220
R6-1209D1	9-18	20	171	±9	±21	±83	73	±220
R6-1212D1	9-18	20	169	±12	±16	±63	74	±220
R6-1215D1	9-18	20	171	±15	±13	±50	73	±220
R6-1218D1	9-18	40	171	±18	±10	±42	73	±220
R6-1224D1	9-18	20	174	±24	±8	±31	72	±100
R6-2405S1	18-36	12	87	5	75	300	72	2200
R6-247R2S1	18-36	12	87	7.2	52	208	72	1000

Suffix "H" means 3.5KVdc isolation
Suffix "M" means Metal Case instead of standard Plastic case

R6 - 1.5W 2:1 Regulated Single & Dual output

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (%)	Capacitor Load (uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
R6-24 09S1	18-36	12	84	9	42	167	74	470
R6-24 12S1	18-36	12	83	12	125	125	75	470
R6-24 15S1	18-36	12	83	15	31	100	75	470
R6-24 18S1	18-36	12	83	18	21	83	75	220
R6-24 24S1	18-36	12	86	24	16	63	73	220
R6-240 5D1	18-36	12	87	±5	±38	±150	72	±1000
R6-247 R2D1	18-36	12	87	±7.2	±26	±104	72	±220
R6-240 9D1	18-36	12	84	±9	±21	±83	74	±220
R6-241 2D1	18-36	12	84	±12	±16	±63	74	±220
R6-241 5D1	18-36	12	84	±15	±13	±50	74	±220
R6-241 8D1	18-36	12	86	±18	±10	±42	73	±220
R6-242 4D1	18-36	12	87	±24	±8	±31	72	±100
R6-48 05S1	36-72	8	45	5	75	300	70	2200
R6-487 R2S1	36-72	8	43	7.2	52	208	72	1000
R6-48 09S1	36-72	8	43	9	42	167	73	470
R6-48 12S1	36-72	8	42	12	125	125	74	470
R6-48 15S1	36-72	8	42	15	31	100	74	470
R6-48 18S1	36-72	8	43	18	21	83	73	220
R6-48 24S1	36-72	8	44	24	16	63	71	220
R6-480 5D1	36-72	8	43	±5	±38	±150	72	±1000
R6-487 R2D1	36-72	8	43	±7.2	±26	±104	72	±220
R6-480 9D1	36-72	8	43	±9	±21	±83	73	±220
R6-481 2D1	36-72	8	43	±12	±16	±63	73	±220
R6-481 5D1	36-72	8	43	±15	±13	±50	73	±220
R6-481 8D1	36-72	8	43	±18	±10	±42	72	±220
R6-482 4D1	36-72	8	44	±24	±8	±31	71	±100


Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

TEST CONFIGURATIONS

EMI Filter

Input filter components (C1,C2, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

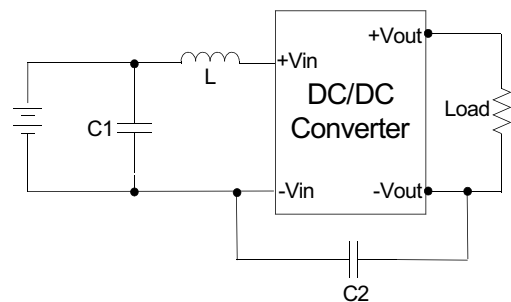


	C1	L	C2
R6-05XXXXX	220uF/100V	12uH	
R6-12XXXXX	220uF/100V	12uH	
R6-24XXXXX	220uF/100V	12uH	MLCC 471K
R6-48XXXXX	220uF/100V	12uH	MLCC 471K

R6 - 1.5W 2:1 Regulated Single & Dual output

NOTE


1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.
7. Input filter components are be required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
8. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220uF/100V.

MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

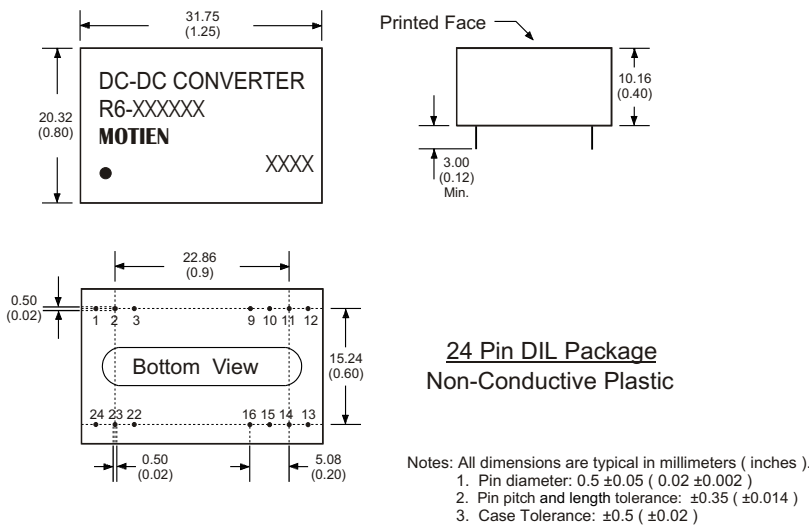

PIN CONNECTIONS				
PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.

MECHANICAL SPECIFICATIONS

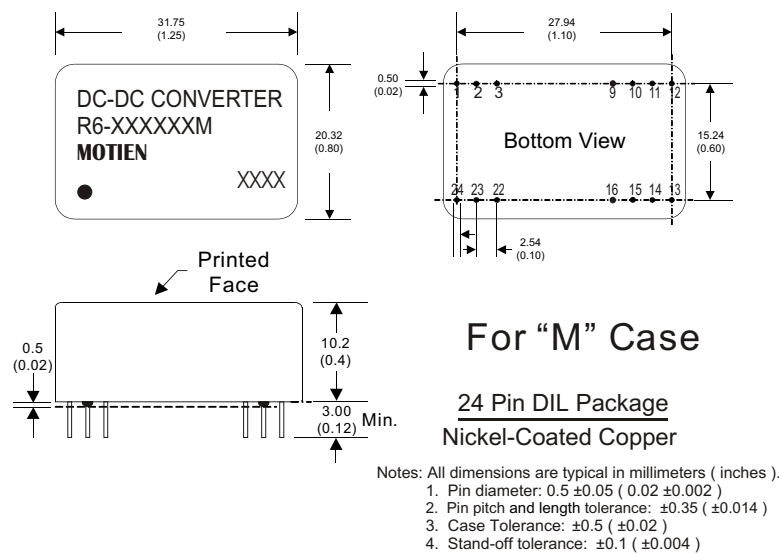

PIN CONNECTIONS				
PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.